

# POLYTETRAFLUOROETHYLENE

## PTFE Series



Extruded from chemically inert compound, PTFE thin walled tubing is used in a wide range of applications, Aerospace, Medical and Chemical.

### Key Features:

- Excellent resistance to chemicals.
- Excellent temperature range -60°C to +250°C.
- Excellent co-efficiency of friction.
- FDA approved.
- Excellent weathering properties.
- Excellent electrical insulation properties.


### Sizes:

50m and 100m lengths

Please note other sizes and coil lengths available upon request

### Colours:

Natural

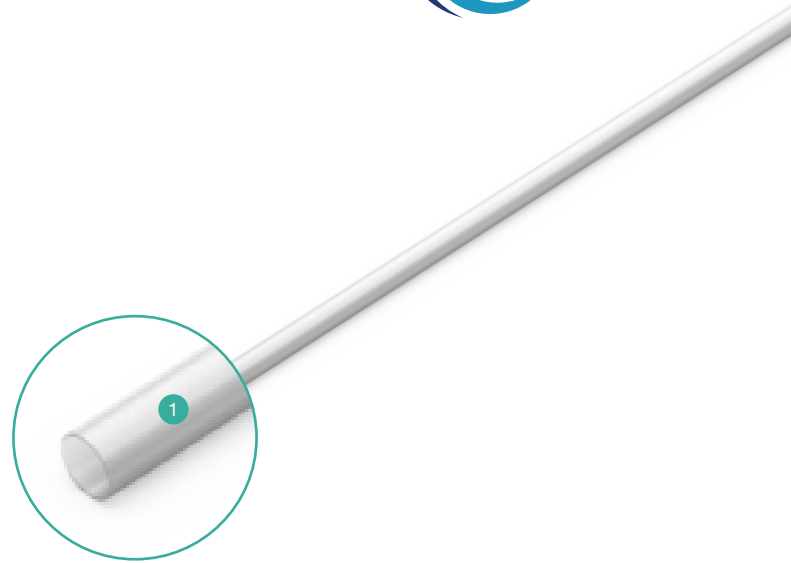


1. Polytetrafluoroethylene



### Applications:

- Pneumatic control system
- Fuel and lubrication lines
- Chemical transfer tubing



Product Ref	Internal Diameter	External Diameter	Minimum Burst Pressure	Coil Length
PTFE03	2mm	3mm	85	100m
PTFE04	2.5mm	4mm	100	100m
PTFE06	4mm	6mm	84	100m
PTFE08	5mm	8mm	100	50m
PTFE08	6mm	8mm	56	100m
PTFE10	8mm	10mm	42	100m
PTFE12	9mm	12mm	56	50m
PTFE12	10mm	12mm	34	50m
PTFE15	12mm	15mm	40	25m