

# THERMOFLEX

## STC Series



Designed for high temperature wash down applications, such as dairy/animal farming and food processing. Allows heated water to flow reliably and under pressure in to demanding cleaning applications.

### Key Features:


- High performance materials and composition.
- Unique six-layer design with a double polyester fiber reinforcement.
- Can withstand constant temperatures of up to 70°C, with peaks of 80°C.
- Flexible, allowing easy handling.
- Stain resistant outer surface guards against oils and detergents.
- Kink resistant.
- Made from food grade PVC.

### Sizes:

Available in 50m coils

### Colours:

Blue


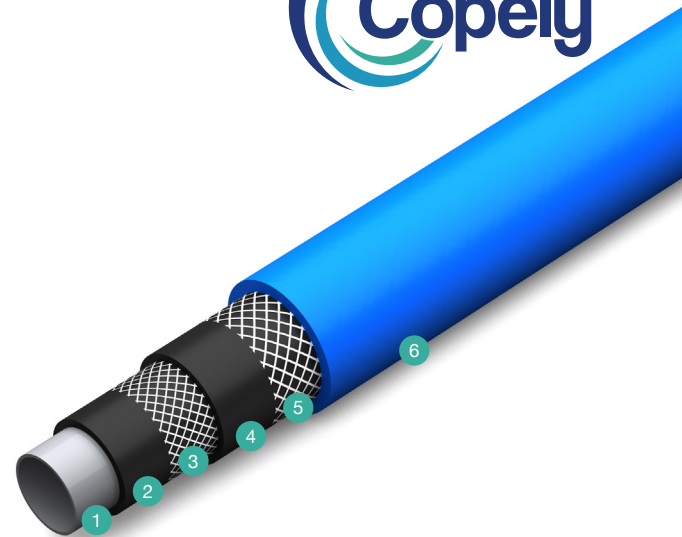


1. Flexible food grade PVC
2. High temperature resistant PVC
- 3+5. Double polyester reinforcing
4. Intermediate flexible PVC bonding layer
6. Fat & grease resistant PVC



### Applications:

- Industrial uses
- Dairy industry
- Shopkeepers, craftsmen
- Slaughterhouses

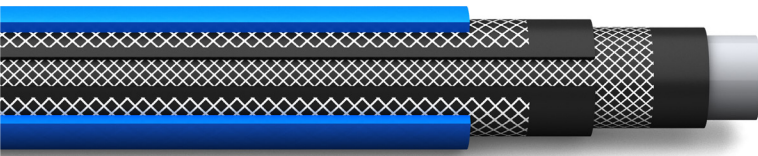

Product Ref	Internal Diameter	External Diameter	Wall Thickness	Maximum Working Pressure	Minimum Burst Pressure	Weight per metre	Bend Radius (Approx.)
STC	12mm	22mm	5mm	80 Bar	240 Bar	335 Kg	84