

NYLON TUBING

FLEXIBLE - IMPERIAL SIZES

NMF Series



All the features of the Flexible Nylon tubing but provided in imperial tube dimensions. Industrial tubing made from flexible nylon. Ideally suited for pneumatic/hydraulic applications such as air brakes, as well as fuel and lube applications. Also ideal for low toxic or high temperature environments such as breweries or applications involving food contact.

Key Features:

- Flexible, lightweight and durable over a wide temperature range.
- Mirror smooth inner for improved flow.
- Manufactured from heat and light stabilised Type 12 Nylon to precise tolerances.
- Available on dispensing drums to order.
- Resistant to a wide range of chemicals.
- High resistance to moisture absorption.
- Silicone-free.
- Excellent abrasion resistance.
- 3:1 Safety factor.

Sizes:


Available in 30m coils.
Longer lengths available to order
1/8" to 1" OD

Colours:

Natural, black, other colours available on request




1. Impact modified PA12

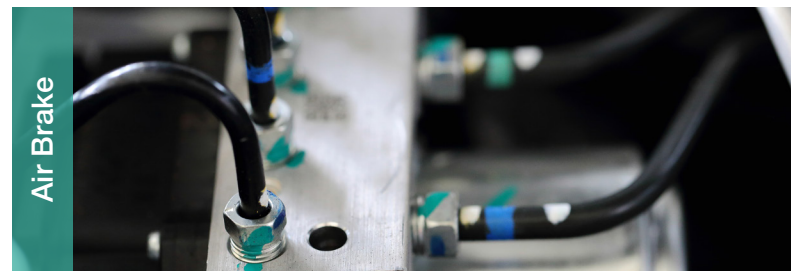

Applications:

- Air brake, fuel and lube applications as well as secondary air systems



Product Ref	Internal Diameter	External Diameter	Maximum Working Pressure	Minimum Burst Pressure	Weight per Metre	Bend Radius
NMF04	0.075"	1/8"	22 Bar	68 Bar	0.005 Kg	3/4"
NMF06	0.117"	3/16"	23 Bar	69 Bar	0.011 Kg	3/4"
NMF08	0.170"	1/4"	24 Bar	70 Bar	0.017 Kg	1"
NMF10	0.212"	5/16"	25 Bar	71 Bar	0.028 Kg	1 1/2"
NMF12	0.250"	3/8"	26 Bar	72 Bar	0.041 Kg	2"
NMF16	0.375"	1/2"	27 Bar	73 Bar	0.057 Kg	2"
NMF20	0.500"	5/8"	28 Bar	74 Bar	0.073 Kg	3 1/2"
NMF24	0.594"	3/4"	29 Bar	75 Bar	0.109 Kg	6"
NMF32	0.812"	1"	30 Bar	76 Bar	0.177 Kg	9"