

AIR-CORD ULTRA FLEXIBLE AIR HOSE

CXL Series



Air-Cord, as used by the largest air tool manufacturer in the world, is a revelation in super-supply, premium quality hosing considered to be the lightest air tool hose of its type featuring Braidlok technology for optimum performance.

Key Features:

- Exceptional flexibility and memory for maximum air flow.
- Ultra lightweight for ease of use.
- Effective oil resistance.
- Superior kink-resistance.
- Cadmium-free.
- Silicone-free.
- RoHS 3 compliant.
- Distinctive metallic blue finish.
- Service temperature -15°C to +60°C.
- Conforms to ISO 5774.
- 3:1 safety factor at +23°C.

Sizes:

Available in 30m coils
6mm - 12mm ID

Colours:

Metallic blue

Other colours available on request



1. Modified high strength Phthalate free PVC
2. Reinforced fiber reinforcement
3. Super flexible Phthalate free PVC




Applications:

- Air tools
- General industrial use for water, chemicals and gas



| Product Ref | Internal Diameter | External Diameter | Maximum Working Pressure | Minimum Burst Pressure | Weight per Metre | Bend Radius |
|--------------|-------------------|-------------------|--------------------------|------------------------|------------------|-------------|
| CXL06 | 6mm | 8.65mm | 14 Bar | 42 Bar | 0.042 Kg | 28mm |
| CXL08 | 8mm | 11.25mm | 14 Bar | 42 Bar | 0.056 Kg | 29mm |
| CXL10 | 10mm | 12.95mm | 12 Bar | 36 Bar | 0.069 Kg | 40mm |
| CXL12 | 12mm | 16.25mm | 11 Bar | 33 Bar | 0.108 Kg | 55mm |

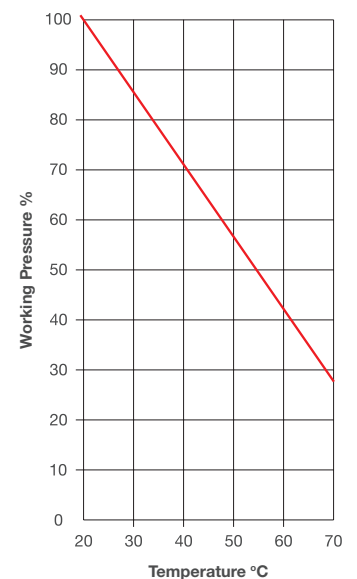

Max. recommended continuous working temperature = 60°C