

# SPIRALFLEX HD

SPH Range



Offers quick and simple protection to all types of hydraulic and pneumatic hoses. A cost-effective solution to shocks, abrasion and deterioration, helping reduce equipment downtime and maintenance costs.

Easily deployed to new or existing hydraulic and pneumatic assemblies, without the use of any tools.

## Key Features:

- Simple to use with one or several hoses.
- Smooth rounded edges prevent damage to hose assemblies or equipment during installation and use.
- Can withstand a temperature range -40°C to +138°C.
- Suitable for contact with hydraulic fluids including glycol and phosphate based products.

## Sizes:

Available in 20m and 50m coils


## Colours:

Black, red and yellow

Other colours are available upon request

## Packaging:

Supplied boxed for ease of handling.


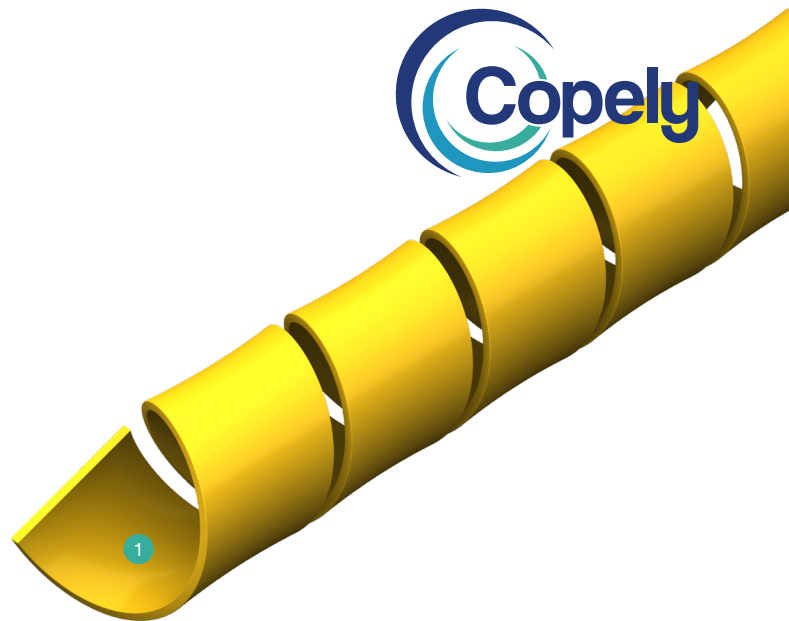


## 1. High Density Polyethylene (HDPE)



## Applications:

- Hydraulic
- Pneumatic
- Paint spray
- Chemical or industrial hoses



Product Ref	Size Range	External Diameter	Wall Thickness	Weight per coil	Coil Length
SPH16/50	11.5-16mm	16mm	1.5mm	2.9 Kg	50m
SPH20/50	14-20mm	20mm	1.8mm	5.1 Kg	50m
SPH25/50	20-25mm	25mm	2.0mm	6.4 Kg	50m
SPH32/50	25-32mm	32mm	2.4mm	11.5 Kg	50m
SPH40/50	32-40mm	40mm	2.4mm	13.4 Kg	50m
SPH50/20	38-50mm	50mm	3.0mm	8.5 Kg	20m
SPH63/20	50-63mm	63mm	3.5mm	12.6 Kg	20m
SPH75/20	60-75mm	75mm	3.8mm	16.3 Kg	20m